




Sprinklers

PRODUCT CATALOGUE

Extended Coverage Sprinklers

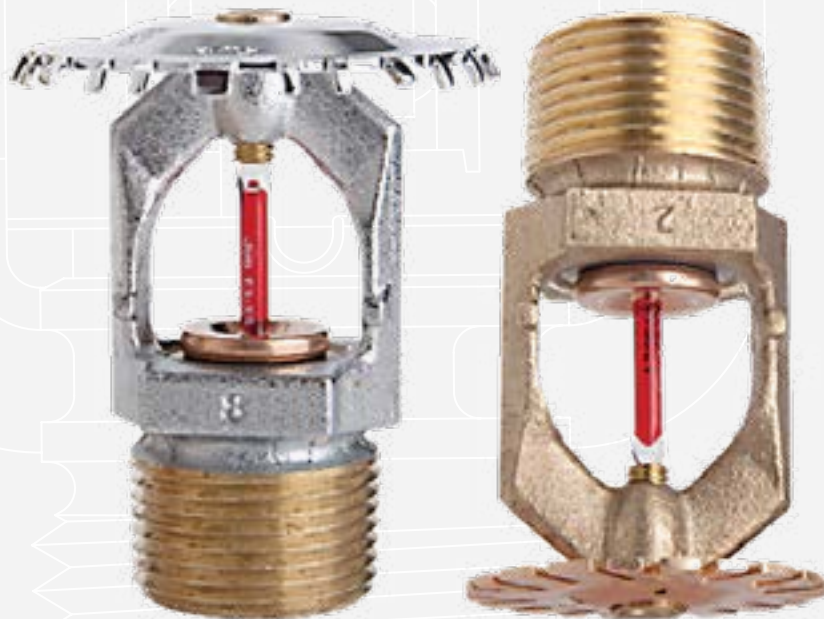

Extended Coverage Sprinklers							
EC-5	TY3232	Pendent	1/2"	K-(5.6) IMP	3 mm Bulb	Extended Coverage	TFP228
EC-5	TY3302	Horizontal Sidewall	1/2"	K-(5.6) IMP	3 mm Bulb	Extended Coverage	TFP298
EC-8	TY4232	Pendent	3/4"	K-(8.0) IMP	3 mm Bulb	Extended Coverage	TFP223
EC-8C	TY4282	Pendent	3/4"	K-(8.0) IMP	3 mm Bulb	Extended Coverage	TFP226
EC-11	TY5137	Upright	3/4"	K-(11.2) IMP	3 mm Bulb	Extended Coverage	TFP220
EC-11	TY5237	Pendent	3/4"	K-(11.2) IMP	3 mm Bulb	Extended Coverage	TFP220
EC-14	TY6237	Pendent	3/4"	K-(14.0) IMP	3 mm Bulb	Extended Coverage	TFP220
EC-14	TY6137	Upright	3/4"	K-(14.0) IMP	3 mm Bulb	Extended Coverage	TFP220
EC-25	TY9128	Upright	1"	K-(25.2) IMP	Solder	Extended Coverage	TFP213
TY-FRB	TY3332	Horizontal Sidewall	1/2"	K-(5.6) IMP	3 mm Bulb	Extended Coverage	TFP296
TY-FRB	TY4332	Horizontal Sidewall	3/4"	K-(8.0) IMP	3 mm Bulb	Extended Coverage	TFP296
SW-20	TY5332	Horizontal Sidewall	3/4"	K-(5.6) IMP	3 mm Bulb	Standard Response, Extended Coverage	TFP230
SW-24	TY5337	Horizontal Sidewall	3/4"	K-(5.6) IMP	3 mm Bulb	Standard Response, Extended Coverage	TFP230
TY-FRL	TY3322	Horizontal Sidewall	1/2"	K-(5.6) IMP	Solder	Extended Coverage	TFP280
TY-FRL	TY4322	Horizontal Sidewall	3/4"	K-(8.0) IMP	Solder	Extended Coverage	TFP280
CHEC	TY5522	Concealed HSW	3/4"	K-(8.0) IMP	3 mm Bulb	Quick Response, Extended Coverage	TFP265
ELOC	TY4332	Concealed Pendent	3/4"	K-(11.2) IMP	Solder	Extended Coverage	TFP250
RFII	TY3532	Concealed Pendent	1/2"	K-(5.6) IMP	3 mm Bulb	Quick Response, Extended Coverage	TFP260
RFII-MRI	TY3537	Concealed Pendent	1/2"	K-(5.6) IMP	3 mm Bulb	Quick Response, Extended Coverage	TFP262
RFIII	TY4522	Horizontal Sidewall	3/4"	K-(8.0) IMP	Solder	Quick Response, Extended Coverage	TFP270

Extended Coverage Sprinklers

LIGHT HAZARD

tyco

EC-5, 3mm Glass Bulb Type 1/2" NPT (15mm)

Pendent and Recessed Pendent*

K-Factor (5.6) IMP - Quick Response - Pendent - Recessed Pendent*						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C / °F	PART NUMBER
TY3232	Pendent	1/2" NPT 15mm	K-(5.6) IMP K-(8.0) MET	Natural Brass	57°C/135°F 68°C/155°F	51-051-1-135 51-051-1-155
				Chrome Plated	57°C/135°F 68°C/155°F	51-051-9-135 51-051-9-155
				Signal White (RAL9003)	57°C/135°F 68°C/155°F	51-051-4-135 51-051-4-155
				Pure White (RAL9010)	57°C/135°F 68°C/155°F	51-051-3-135 51-051-3-155
TY3232-R*	Recessed Pendent*					

*Note: The recessed escutcheon must be ordered separately.



K-Factor (5.6) IMP - Horizontal Sidewall - Recessed Horizontal Sidewall*						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C / °F	PART NUMBER
TY3302	Horizontal Sidewall	1/2" NPT 15mm	K-(5.6) IMP K-(8.0) MET	Natural Brass	57°C/135°F 68°C/155°F 93°C/200°F	51-053-1-135 51-053-1-155 51-053-1-200
				Chrome Plated	57°C/135°F 68°C/155°F 93°C/200°F	51-053-9-135 51-053-9-155 51-053-9-200
				Signal White (RAL9003)	57°C/135°F 68°C/155°F 93°C/200°F	51-053-4-135 51-053-4-155 51-053-4-200
				Pure White (RAL9010)	57°C/135°F 68°C/155°F 93°C/200°F	51-053-3-135 51-053-3-155 51-053-3-200
TY3302-R*	Recessed Horizontal Sidewall*					

*Note: The recessed escutcheon must be ordered separately.



DataSheet
TFP228

Back to Table
of Contents



DataSheet
TFP298



Extended Coverage Sprinklers

LIGHT HAZARD, CORRIDORS AND HALLWAYS



EC-8, 3mm Glass Bulb Type 3/4" NPT (20mm)

Pendent - Recessed Pendent* - Horizontal Sidewall - Recessed Horizontal Sidewall*

Light Hazard, K-Factor (8.0) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP – °C /°F	PART NUMBER
TY4232	Pendent	3/4" NPT 20mm	K-(8.0) IMP K-(11.0) MET	Natural Brass	57°C/135°F 68°C/155°F	50-801-1-135 50-801-1-155
				Chrome Plated	57°C/135°F 68°C/155°F	50-801-9-135 50-801-9-155
				Signal White (RAL9003)	57°C/135°F 68°C/155°F	50-801-4-135 50-801-4-155
TY4232-R*	Recessed Pendent*			Natural Brass	57°C/135°F 68°C/155°F	50-801-1-135* 50-801-1-155*
				Chrome Plated	57°C/135°F 68°C/155°F	50-801-1-135* 50-801-1-155*
				Signal White (RAL9003)	57°C/135°F 68°C/155°F	50-801-1-135* 50-801-1-155*

*Note: The recessed escutcheon must be ordered separately.

Corridors and Hallways, K-Factor (8.0) IMP - Quick Response						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C /°F	PART NUMBER
TY4282	Pendent	3/4" NPT 20mm	K-(8.0) IMP K-(11.0) MET	Natural Brass	68°C/155°F 93°C/200°F	57-351-1-155 57-351-1-200
				Chrome Plated	68°C/155°F 93°C/200°F	57-351-9-155 57-351-9-200
				Signal White (RAL9003)	68°C/155°F 93°C/200°F	57-351-4-155 57-351-4-200
				Pure White (RAL9010)	68°C/155°F 93°C/200°F	57-351-3-155 57-351-3-200
				Jet Black (RAL9005)	68°C/155°F 93°C/200°F	57-351-5-155 57-351-5-200
TY4282-R*	Recessed Pendent*					

*Note: The recessed escutcheon must be ordered separately.



DataSheet
ITP223

▲
Back to Table
of Contents



DataSheet
ITP226



Extended Coverage Sprinklers

LIGHT AND ORDINARY HAZARD



EC-11, 3mm Glass Bulb Type 3/4" NPT (20mm) Upright

K-Factor (11.2) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C /°F	PART NUMBER
TY5137	Upright	3/4" NPT 20mm	K-(11.2) IMP K-(16.1) MET	Natural Brass	57°C/135°F	51-894-1-135
					68°C/155°F	51-894-1-155
					79°C/175°F	51-894-1-175
					93°C/200°F	51-894-1-200
					141°C/286°F	51-894-1-286
				Chrome Plated	57°C/135°F	51-894-9-135
					68°C/155°F	51-894-9-155
					79°C/175°F	51-894-9-175
					93°C/200°F	51-894-9-200
					141°C/286°F	51-894-9-286
				Signal White (RAL9003)	57°C/135°F	51-894-4-135
					68°C/155°F	51-894-4-155
					79°C/175°F	51-894-4-175
					93°C/200°F	51-894-4-200
					141°C/286°F	51-894-4-286
				Jet Black (RAL9005)	57°C/135°F	51-894-5-135
					79°C/175°F	51-894-5-175
					141°C/286°F	51-894-5-286



DataSheet
TFP220

▲
Back to Table
of Contents



Extended Coverage Sprinklers

LIGHT AND ORDINARY HAZARD

tyco

EC-11, 3mm Glass Bulb Type 3/4" NPT (20mm)

Pendent - Recessed Pendent*

K-Factor (11.2) IMP							
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP – °C /°F	PART NUMBER	
TY5237	Pendent	3/4" NPT 20mm	K-(11.2) IMP K-(16.1) MET	Natural Brass	57°C/135°F	51-893-1-135	
					68°C/155°F	51-893-1-155	
					79°C/175°F	51-893-1-175	
					93°C/200°F	51-893-1-200	
					141°C/286°F	51-893-1-286	
				Chrome Plated	57°C/135°F	51-893-9-135	
					68°C/155°F	51-893-9-155	
					79°C/175°F	51-893-9-175	
TY5237-R*	Recessed Pendent*	3/4" NPT 20mm	K-(11.2) IMP K-(16.1) MET	Natural Brass	93°C/200°F	51-893-9-200	
					141°C/286°F	51-893-9-286	
					Signal White (RAL9003)	57°C/135°F	51-893-4-135
						68°C/155°F	51-893-4-155
						79°C/175°F	51-893-4-175
				Jet Black (RAL9005)	93°C/200°F	51-893-4-200	
					141°C/286°F	51-893-4-286	
				TY5237-R*	Recessed Pendent*	3/4" NPT 20mm	K-(11.2) IMP K-(16.1) MET
68°C/155°F	51-893-1-155*						
79°C/175°F	51-893-1-175*						
93°C/200°F	51-893-1-200*						
141°C/286°F	51-893-1-286*						
Chrome Plated	57°C/135°F	51-893-9-135*					
	68°C/155°F	51-893-9-155*					
	79°C/175°F	51-893-9-175*					
TY5237-R*	Recessed Pendent*	3/4" NPT 20mm	K-(11.2) IMP K-(16.1) MET	Natural Brass	93°C/200°F	51-893-9-200*	
					141°C/286°F	51-893-9-286*	
					Signal White (RAL9003)	57°C/135°F	51-893-4-135*
						68°C/155°F	51-893-4-155*
						79°C/175°F	51-893-4-175*
				Jet Black (RAL9005)	93°C/200°F	51-893-4-200*	
					141°C/286°F	51-893-4-286*	
				TY5237-R*	Recessed Pendent*	3/4" NPT 20mm	K-(11.2) IMP K-(16.1) MET
68°C/155°F	51-893-5-155*						
79°C/175°F	51-893-5-175*						
93°C/200°F	51-893-5-200*						
141°C/286°F	51-893-5-286*						
Chrome Plated	57°C/135°F	51-893-9-135*					
	68°C/155°F	51-893-9-155*					
	79°C/175°F	51-893-9-175*					
TY5237-R*	Recessed Pendent*	3/4" NPT 20mm	K-(11.2) IMP K-(16.1) MET	Natural Brass	93°C/200°F	51-893-9-200*	
					141°C/286°F	51-893-9-286*	
					Signal White (RAL9003)	57°C/135°F	51-893-4-135*
						68°C/155°F	51-893-4-155*
						79°C/175°F	51-893-4-175*
				Jet Black (RAL9005)	93°C/200°F	51-893-4-200*	
					141°C/286°F	51-893-4-286*	



*Note: The recessed escutcheon must be ordered separately.



DataSheet
TFP220

Back to Table
of Contents



Extended Coverage Sprinklers

LIGHT AND ORDINARY HAZARD

tyco

EC-14, 3mm Glass Bulb Type 3/4" NPT (20mm)

Pendent - Recessed Pendent*

K-Factor (14.0) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C / °F	PART NUMBER
TY6237	Pendent	3/4" NPT 20mm	K-(14.0) IMP K-(20.2) MET	Natural Brass	57°C/135°F	51-895-1-135
					68°C/155°F	51-895-1-155
					79°C/175°F	51-895-1-175
					93°C/200°F	51-895-1-200
					141°C/286°F	51-895-1-286
				Chrome Plated	57°C/135°F	51-895-9-135
					68°C/155°F	51-895-9-155
					79°C/175°F	51-895-9-175
					93°C/200°F	51-895-9-200
					141°C/286°F	51-895-9-286
TY6237-R*	Recessed Pendent*	3/4" NPT 20mm	K-(14.0) IMP K-(20.2) MET	Signal White (RAL9003)	57°C/135°F	51-895-4-135
					68°C/155°F	51-895-4-155
					79°C/175°F	51-895-4-175
					141°C/286°F	51-895-4-286
				Jet Black (RAL9005)	57°C/135°F	51-895-5-135
					68°C/155°F	51-895-5-155
					79°C/175°F	51-895-5-175
					93°C/200°F	51-895-5-200
				Natural Brass	57°C/135°F	51-895-1-135*
					68°C/155°F	51-895-1-155*
					79°C/175°F	51-895-1-175*
					93°C/200°F	51-895-1-200*
					141°C/286°F	51-895-1-286*
				Chrome Plated	57°C/135°F	51-895-9-135*
					68°C/155°F	51-895-9-155*
					79°C/175°F	51-895-9-175*
					93°C/200°F	51-895-9-200*
					141°C/286°F	51-895-9-286*
				Signal White (RAL9003)	57°C/135°F	51-895-4-135*
					68°C/155°F	51-895-4-155*
					79°C/175°F	51-895-4-175*
					141°C/286°F	51-895-4-286*
				Jet Black (RAL9005)	57°C/135°F	51-895-5-135*
					68°C/155°F	51-895-5-155*
					79°C/175°F	51-895-5-175*
					93°C/200°F	51-895-5-200*



*Note: The recessed escutcheon must be ordered separately.



DataSheet
TFP220

Back to Table
of Contents



Extended Coverage Sprinklers

LIGHT AND ORDINARY HAZARD

tyco

EC-14, 3mm Glass Bulb Type 3/4" NPT (20mm) Upright

K-Factor (14.0) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C /°F	PART NUMBER
TY6137	Upright	3/4" NPT 20mm	K-(14.0) IMP K-(20.2) MET	Natural Brass	57°C/135°F	51-896-1-135
					68°C/155°F	51-896-1-155
					79°C/175°F	51-896-1-175
					93°C/200°F	51-896-1-200
					141°C/286°F	51-896-1-286
				Chrome Plated	57°C/135°F	51-896-9-135
					68°C/155°F	51-896-9-155
					79°C/175°F	51-896-9-175
					93°C/200°F	51-896-9-200
					141°C/286°F	51-896-9-286
				Signal White (RAL9003)	57°C/135°F	51-896-4-135
					68°C/155°F	51-896-4-155
					79°C/175°F	51-896-4-175
					93°C/200°F	51-896-4-200
					141°C/286°F	51-896-4-286
				Jet Black (RAL9005)	57°C/135°F	51-896-5-135
					68°C/155°F	51-896-5-155
					79°C/175°F	51-896-5-175
					93°C/200°F	51-896-5-200
					141°C/286°F	51-896-5-286



EC-25, Solder 1" NPT (25mm) and ISO 7-R1 Upright

K-Factor (25.0) IMP – Quick Response*						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP – °C /°F	PART NUMBER
TY9128	Upright	1" NPT 25mm	K-(25.2) IMP K-(36.3) MET	Natural Brass	74°C/165°F 100°C/212°F	58-450-1-165 58-450-1-214
		ISO 7-R 1			74°C/165°F 100°C/212°F	58-451-1-165 58-451-1-214



DataSheet
TFP220

▲
Back to Table
of Contents



DataSheet
TFP213



Extended Coverage Sprinklers

LIGHT HAZARD



TY-FRB, 3mm Glass Bulb Type, 1/2" NPT (15mm)

Horizontal Sidewall – Recessed Horizontal Sidewall*

K-Factor (5.6) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP – °C /°F	PART NUMBER
TY3332	Horizontal Sidewall	1/2" NPT 15mm	K-(5.6) IMP K-(8.0) MET	Natural Brass	57°C/135°F 68°C/155°F 79°C/175°F	57-376-1-135 57-376-1-155 57-376-1-175
				Chrome Plated	57°C/135°F 68°C/155°F 79°C/175°F	57-376-9-135 57-376-9-155 57-376-9-175
				Signal White (RAL9003)	57°C/135°F 68°C/155°F 79°C/175°F	57-376-4-135 57-376-4-155 57-376-4-175
				Pure White (RAL9010)	57°C/135°F 68°C/155°F 79°C/175°F	57-376-3-135 57-376-3-155 57-376-3-175
				Jet Black (RAL9005)	57°C/135°F 68°C/155°F 79°C/175°F	57-376-5-135 57-376-5-155 57-376-5-175
TY3332-R*	Recessed Horizontal Sidewall*			Natural Brass	57°C/135°F 68°C/155°F 79°C/175°F	57-376-1-135* 57-376-1-155* 57-376-1-175*
				Chrome Plated	57°C/135°F 68°C/155°F 79°C/175°F	57-376-9-135* 57-376-9-155* 57-376-9-175*
				Signal White (RAL9003)	57°C/135°F 68°C/155°F 79°C/175°F	57-376-4-135* 57-376-4-155* 57-376-4-175*
				Pure White (RAL9010)	57°C/135°F 68°C/155°F 79°C/175°F	57-376-3-135* 57-376-3-155* 57-376-3-175*
				Jet Black (RAL9005)	57°C/135°F 68°C/155°F 79°C/175°F	57-376-5-135* 57-376-5-155* 57-376-5-175*



*Note: The recessed escutcheon must be ordered separately.



DataSheet
IEP296

Back to Table
of Contents



Extended Coverage Sprinklers

LIGHT AND ORDINARY HAZARD



TY-FRB, 3mm Glass Bulb Type, 3/4" NPT (20mm)

Horizontal Sidewall – Recessed Horizontal Sidewall*

K-Factor (8.0) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C /°F	PART NUMBER
TY4332	Horizontal Sidewall	3/4" NPT 20mm	K-(8.0) IMP K-(11.0) MET	Natural Brass	57°C/135°F 68°C/155°F 79°C/175°F	57-396-1-135 57-396-1-155 57-396-1-175
				Chrome Plated	57°C/135°F 68°C/155°F 79°C/175°F	57-396-9-135 57-396-9-155 57-396-9-175
				Signal White (RAL9003)	57°C/135°F 68°C/155°F 79°C/175°F	57-396-4-135 57-396-4-155 57-396-4-175
				Pure White (RAL9010)	57°C/135°F 68°C/155°F 79°C/175°F	57-396-3-135 57-396-3-155 57-396-3-175
				Jet Black (RAL9005)	57°C/135°F 68°C/155°F 79°C/175°F	57-396-5-135 57-396-5-155 57-396-5-175
TY4332-R*	Recessed Horizontal Sidewall*			Natural Brass	57°C/135°F 68°C/155°F 79°C/175°F	57-396-1-135* 57-396-1-155* 57-396-1-175*
				Chrome Plated	57°C/135°F 68°C/155°F 79°C/175°F	57-396-9-135* 57-396-9-155* 57-396-9-175*
				Signal White (RAL9003)	57°C/135°F 68°C/155°F 79°C/175°F	57-396-4-135* 57-396-4-155* 57-396-4-175*
				Pure White (RAL9010)	57°C/135°F 68°C/155°F 79°C/175°F	57-396-3-135* 57-396-3-155* 57-396-3-175*
				Jet Black (RAL9005)	57°C/135°F 68°C/155°F 79°C/175°F	57-396-5-135* 57-396-5-155* 57-396-5-175*



*Note: The recessed escutcheon must be ordered separately.



DataSheet
IEP296

Back to Table
of Contents



Extended Coverage Sprinklers

ORDINARY HAZARD

tyco

SW-20 ECOH, 3mm Glass Bulb Type, 3/4" NPT (20mm)

Horizontal Sidewall

K-Factor (5.6) IMP - Coverage Area (16x20ft)						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C /°F	PART NUMBER
TY5332	Horizontal Sidewall	3/4" NPT 20mm	K-(5.6) IMP K-(8.0) MET	Natural Brass	68°C/155°F 93°C/200°F	51-072-1-155 51-072-1-200
				Chrome Plated	68°C/155°F 93°C/200°F	51-072-9-155 51-072-9-200
				Signal White (RAL9003)	68°C/155°F 93°C/200°F	51-072-4-155 51-072-4-200



SW-24 ECOH, 3mm Glass Bulb Type, 3/4" NPT (20mm)

Horizontal Sidewall

K-Factor (5.6) IMP - Coverage Area (16x24ft)						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C /°F	PART NUMBER
TY5337	Horizontal Sidewall	3/4" NPT 20mm	K-(5.6) IMP K-(8.0) MET	Natural Brass	68°C/155°F 93°C/200°F	51-073-1-155 51-073-1-200
				Chrome Plated	68°C/155°F 93°C/200°F	51-073-9-155 51-073-9-200
				Signal White (RAL9003)	68°C/155°F 93°C/200°F	51-073-4-155 51-073-4-200



DataSheet
TFP230

Back to Table
of Contents



Extended Coverage Sprinklers

LIGHT HAZARD

tyco

TY-FRL, Solder, 1/2" NPT (15mm)

Horizontal Sidewall - Recessed Horizontal Sidewall*

K-Factor (5.6) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C /°F	PART NUMBER
TY3322	Horizontal Sidewall	1/2" NPT 15mm	K-(5.6) IMP K-(8.0) MET	Natural Brass	74°C/165°F	58-970-1-165
				Chrome Plated	74°C/165°F	58-970-9-165



TY-FRL, Solder, 3/4" NPT (20mm)

Horizontal Sidewall - Recessed Horizontal Sidewall*

K-Factor (8.0) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C /°F	PART NUMBER
TY4322	Horizontal Sidewall	3/4" NPT 20mm	K-(8.0) IMP K-(11.0) MET	Natural Brass	74°C/165°F	58-170-1-165
				Chrome Plated	74°C/165°F	58-170-9-165



DataSheet
IFP280

▲
Back to Table
of Contents



Extended Coverage Concealed Sprinklers

QUICK RESPONSE – LIGHT HAZARD

tyco

CHEC, 3mm Glass Bulb Type, 3/4" NPT (20mm)

Concealed Horizontal Sidewall

K-Factor (8.0) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C /°F	PART NUMBER
TY4332	Concealed HSW	3/4" NPT 20mm	K-(8.0) IMP K-(11.0) MET	Bronze	68°C/155°F	51-396-1-155
Cover Plate Finish Options			Chrome Signal White (RAL 9003) Pure White (RAL 9010) Custom Paint		59°C/139°F	56-396-9-135 56-396-4-135 56-396-3-135 56-396-X-135



ELOC, Solder, 3/4" NPT (20mm)

Concealed Pendent

K-Factor (11.2) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C /°F	PART NUMBER
TY5522	Concealed Pendent	3/4" NPT 20mm	K-(11.2) IMP K-(16.1) MET	Brass	71°C/160°F 100°C/212°F	50-701-1-160 50-701-1-212
Cover Plate Finish Options			Brass Chrome Gray White (RAL9002) Pure White (RAL9010) Signal White (RAL9003) Custom		59°C/139°F	56-892-1-135 56-892-9-135 56-892-0-135 56-892-3-135 56-892-4-135 56-892-X-135
			Brass Chrome Gray White (RAL9002) Pure White (RAL9010) Signal White (RAL9003) Custom Paint		74°C/165°F	56-892-1-165 56-892-9-165 56-892-0-165 56-892-3-165 56-892-4-165 56-892-X-165



DataSheet
TFP265

▲
Back to Table
of Contents



DataSheet
TFP250



Extended Coverage Concealed Sprinklers

QUICK RESPONSE

tyco

RFII, 3mm Glass Bulb Type, 1/2" NPT (15mm) Concealed Pendent

RFII, K-Factor (5.6) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C / °F	PART NUMBER
TY3532	Concealed Pendent	1/2" NPT 15mm	K-(5.6) IMP K-(8.0) MET	Bronze	68°C/155°F 93°C/200°F	51-794-1-155 51-794-1-200
Cover Plate Finish Options			Brass Chrome Gray White (RAL9002) Pure White (RAL9010) Signal White (RAL9003) Jet Black (RAL9005) Terra Brown (RAL8028) Custom Paint		59°C/139°F	56-792-1-135 56-792-9-135 56-792-0-135 56-792-3-135 56-792-4-135 56-792-6-135 56-792-7-135 56-792-X-135
			Brass Chrome Gray White (RAL9002) Pure White (RAL9010) Signal White (RAL9003) Jet Black (RAL9005) Terra Brown (RAL8028) Custom Paint		74°C/165°F	56-792-1-165 56-792-9-165 56-792-0-165 56-792-3-165 56-792-4-165 56-792-6-165 56-792-7-165 56-792-X-165



RFII-MRI, 3mm Glass Bulb Type, 1/2" NPT (15mm) Non-Magnetic Concealed Pendent

Royal Flush II magnetic resonance imaging (MRI) environment- K-Factor (5.6) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C / °F	PART NUMBER
TY3537	Concealed Pendent	1/2" NPT 15mm	K-(5.6) IMP K-(8.0) MET	Bronze	68°C/155°F 93°C/200°F	51-802-1-155 51-802-1-200
Cover Plate Finish Options			Brass Gray White (RAL9002) Signal White (RAL9003) Jet Black (RAL9005) Custom		59°C/139°F	56-794-1-135 56-794-0-135 56-794-4-135 56-794-6-135 56-794-X-135
			Brass Gray White (RAL9002) Signal White (RAL9003) Jet Black (RAL9005) Custom Paint		74°C/165°F	56-794-1-165 56-794-0-165 56-794-4-165 56-794-6-165 56-794-X-165



DataSheet
IFP260



DataSheet
IFP262

▲
Back to Table
of Contents



Extended Coverage Concealed Sprinklers

QUICK RESPONSE – LIGHT HAZARD

tyco

MODEL RFIII, Solder, 3/4" NPT (20mm)

Concealed Horizontal Sidewall

K-Factor (8.0) IMP						
SIN NUMBER	ORIENTATION	THREAD SIZE	K-FACTOR	FINISH	TEMP - °C /°F	PART NUMBER
TY4522	Sidewall	3/4" NPT 20mm	K-(8.0) IMP K-(11.0) MET	Brass	71°C/160°F	51-113-1-160
Cover Plate Finish Options			Ivory (RAL1015) Bright Chrome Beige (RAL1001) Pure White (RAL9010) Signal White (RAL9003) Gray White (RAL9002) Brown (RAL8028) Black (RAL9005) Brushed Brass Brushed Chrome Custom Paint		59°C/139°F	56-204-0-135 56-204-1-135 56-204-2-135 56-204-3-135 56-204-4-135 56-204-5-135 56-204-6-135 56-204-7-135 56-204-8-135 56-204-9-135 56-204-X-135



DataSheet
TFP270

▲
Back to Table
of Contents





Fire Factory Australia is an active distributor of TYCO Fire Protection Products.

For ordering and enquiries, please [contact](#) our team.

For the latest information on product specifications, certifications, approvals, and technical details, always refer to the Tyco product datasheets.

Our experienced team is available to assist you in selecting the most suitable sprinkler for your project and to provide professional, project-specific advice.

Fire Factory Australia

Unit 2/2 Parramatta Rd, Granville NSW 2142, Australia

P: (02)9756 0087

E: sales@firefactory.com.au

W: www.firefactory.com.au

Product specifications, approvals, and availability are subject to change without notice. Always refer to the latest Tyco Fire Protection Products datasheets for complete and current information.