



FIRE EQUIPMENT PRODUCTS
100% Australian Owned

LED EMERGENCY SPOTLIGHT FFASP3W, FFASP3WB, FFASM3W



The FFASP3W-ST series use for LED lighting, and use constant output current mode. These units will provide 1W maximum output power at emergency mode. They are designed to be highly efficient and highly reliable. There are four new functions on this unit: Overcharge; Over discharge; Over temperature and Reverse battery protection.

Feature

- Output power 3W
- Insulation Class: II
- Ingress Protection: IP20
- Emergency Duration: 3hours
- Battery Recharge Time: 16h
- Self-Test
- Polycarbonate white RAL 9016
- Charge indicator: Green LED
- Deep Discharge Protection DDP
- Non-maintained Operation
- 3.2V 1500mAh LiFePO4 Battery
- 5 Years Replacement Warranty

General Specification

Rated supply voltage	220-240VAC
Mains frequency	50/60Hz
Ambient temperature t_a	0 °C ~ 45 °C
Max. Casing temperature t_c	70 °C

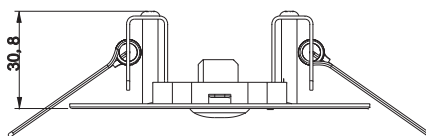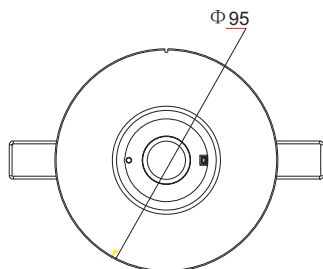

Dia:mm

Item Code	Batteries	Power	Classification	Emergency time	Mode
FFASP3W-ST	LiFePO4 3.2V/1500mAh battery	3W	120lm	3h	Open Area

Note: All specifications are typical at 25 °C unless otherwise stated.

