




0.6/1 kV RATED

Fire Rated Alarm Cable – 2hr Fire Rated

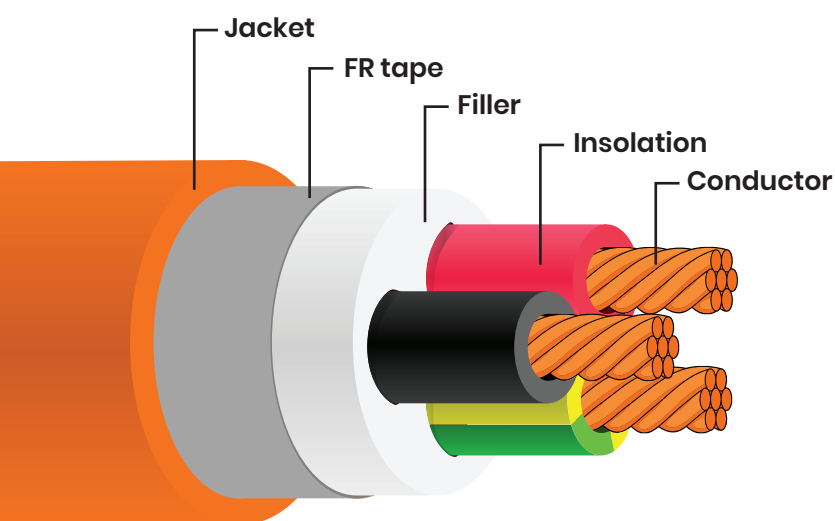

Product Overview

Fire Factory Australia's Orange Circular Cable is available in 1.5 mm² and 2.5 mm² sizes. It has X-90 insulation and an orange 5V-90 outer sheath. The supplied specifications list this cable for power mains, submains and subcircuits in residential buildings and commercial or industrial plants. Installation may be enclosed, unenclosed or in conduit, subject to the electrical design and installation requirements.



Applications

Typically used for Power Mains, Sub mains and sub circuits enclosed, unenclosed in

Cable Construction

Component	Material or construction
Conductors	Stranded bare copper
Insulation	X-90
Outer jacket	5V-90

General Information

Property	Specification
Rated voltage	0.6/1 kV
Cable type	Twin and earth TPS
Core identification	Core 1: Red; Core 2: Black; Core 3: Green/Yellow
Supplied length	100 m



0.6/1 kV RATED

Fire Rated Alarm Cable – 2hr Fire Rated

Cable Construction

Product code	Conductor size	Cores	Stranding construction	Nominal insulation thickness	Nominal overall diameter
FFA OCC-2C-1.5	1.5 mm ²	3	7 × 0.66 mm	0.7 mm	10.3 mm
FFA OCC-2C-2.5	2.5 mm ²	3	7 × 0.67 mm	0.7 mm	11.2 mm

Fire Factory Australia Red 2HR Fire Rated Cable



Standards

Aspect	Reference shown
Standard listed	AS/NZS 5000.1



global-mark

Contact: Fire Factory Australia

Fire Factory Australia periodically improves its products. As a result, product specifications and details may change without prior notice. Please contact us to confirm the latest information before ordering.

(02) 9756 0087
www.firefactory.com.au